TECHNICAL INFORMATION

Installation Guide

- The subfloor surfaces must be level, flat, clean, dry, smooth, and free of movement. All surface imperfections should be filled and sanded with a portland cement-based latex patching compound.
- Room temperature must be maintained at 18℃ or higer before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot # are the same.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Wood Collection on the flat surface to keep it from warping.

Size & Packing

Size		Thickness	/ BOX	/ BOX
15.2cm×91.4cm	6″×36″	2.0mm/2.5mm/3.0mm	24pcs	3.344m²
18.4cm×121.9cm	7.25″×48″	2.0mm/2.5mm/3.0mm	15pcs	3.367m²

Technical Data


Classification	Standard	Wood 2.0	Wood 2.5	Wood 3.0
Total thickness	EN 428	2.0mm	2.5mm	3.0mm
Wear layer thickness	EN 429	0.2mm	0.3mm	0.3mm
Total weight	EN 430	3450g/m²	4560g/m²	5500g/m²
Surface treatment	---	PUR	PUR	PUR
Classification	EN 685	33-42	33-42	33-42
Reaction to fire	EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
Electrical properties	EN 1815	<2kV	<2kV	<2kV
Slip resistance	DIN 51130	R9-R10	R9-R10	R9-R10
Abrasion group	EN 660-2	Group T	Group T	Group T
Curl resultant to heat	EN 434	≤2mm	≤2mm	≤2mm
Residual indentation	EN 433	≤0.05mm	≤0.05mm	≤0.05mm
Impact sound reduction	EN ISO 717-2	4dB	5dB	6dB
Castor chair	EN 425	No damage	No damage	No damage
Thermal resistance	EN ISO 12524	0.25W/(m.K)	0.25W/(m.K)	0.25W/(m.K)
Light fastness	EN ISO 105-B02	≥6	≥6	≥6
Chemical resistance	EN 423	Good	Good	Good

1

Wood Collection

LUXURY VINYL TILES

Wood Collection

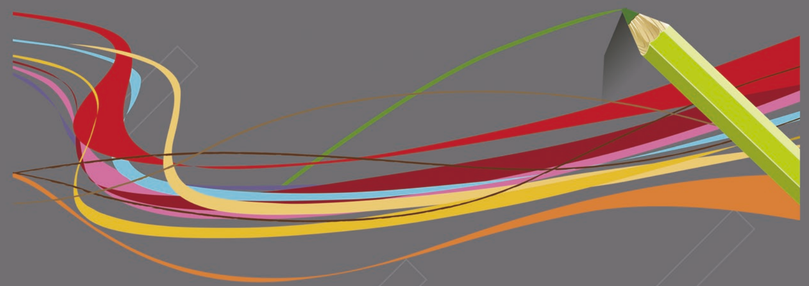

> Offices
> Education
> Healthcare
> Retail
> Show
> Public building





ID FLOORING
FLOORS THAT DEFINE YOU

Great design options
A people friendly solution
The best solution for every area and every application









Offices | Stores & Shops | Gym | Dance | Housing | Education | Healthcare | Aged Care

AVAILABLE THICKNESS



2.0mm



2.5mm




3.0mm



4.0mm

ACOUSTIC UNDERLAY

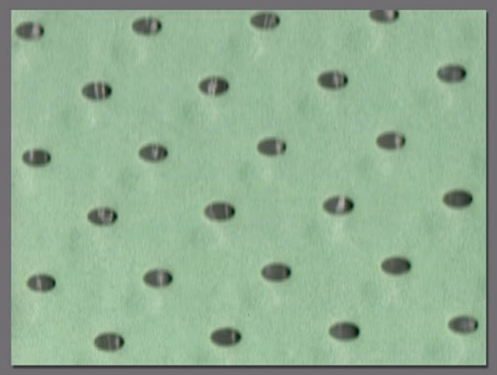


PE foam Size:1m×20m×2.0mm



Rubber foam Size:1m×20m×3.0mm

- Protection against humidity
- Powerful acoustic insulation
- Greater comfort
- Quick and easy to install

STRUCTURE OF WOOD

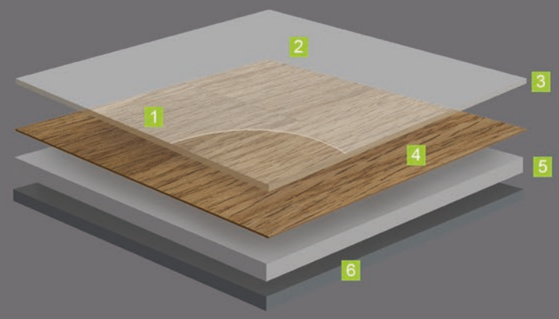

1. Surface embossing
   Textures close to real materials
2. PUR reinforcement
   Extreme resistance and easy low cost maintenance
3. Transparent wear layer
   Exceptional hardwearing and indentation resistant
4. High definition printing layer
   With great customisation possibilities
5. Unique composite sturcture
   Deimensional stability and excellent resistance to tear and indentation
6. PVC backing
   Suitable for either floating or glue-down installation

AVAILABLE DIMENSIONS


15.2 × 91.4 cm

18.4 × 121.9 cm

45.7 × 45.7 cm

45.7× 91.4 cm

2.0 mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm



THE ADVANTAGES OF LVT



Great Design Options

- 200+ colour options and 8 different surface aspects.
- Plank and tile dimensions that you can combine to compose you own flooring expressions.



Hard wearing and easy cleaning

- Treated with pur surface protection that hardens the surface and simplifies cleaning and maintenance through reduced use of water,enerty and chemical detergents.



Water resistant

- Suitable for wet areas such as bathrooms, kitchens, store rooms, basements, etc.
- Our waterproof floors keep their shape in those damp circumstances – they don't swell up and simply repel the water.



People-friendly solution

- Helps improve indoor air quality with VOC emissions below quantifiable levels, under 10μg/m³ after 28 days.
- Uses phthalate-free technology based on alternative plasticizers.

Wood Collection

Size: 6″×36″ (15.2cm × 91.4cm) / 7.25″×48″(18.4cm × 121.9cm)
Thickness: 2.0mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm



WD - 2501



WD - 2502



WD - 2503



WD - 2504



WD - 2505



WD - 2506

Wood Collection

Size: 6″×36″ (15.2cm × 91.4cm) / 7.25″×48″(18.4cm × 121.9cm)
Thickness: 2.0mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm

Wood Collection



WD-2507



WD-2508



WD-2509



WD-2510



WD-2511



WD-2512



WD-2513



WD-2514



WD-2515

TECHNICAL INFORMATION

Installation Guide

- The subfloor surfaces must be level, flat, clean, dry, smooth, and free of movement. All surface imperfections should be filled and sanded with a portland cement-based latex patching compound.
- Room temperature must be maintained at 18℃ or higer before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot # are the same.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Wood Collection on the flat surface to keep it from warping.

Size & Packing

Size		Thickness	/ BOX	/ BOX
15.2cm×91.4cm	6″×36″	2.0mm/2.5mm/3.0mm	24pcs	3.344m²
18.4cm×121.9cm	7.25″×48″	2.0mm/2.5mm/3.0mm	15pcs	3.367m²

Technical Data


Classification	Standard	Wood 2.0	Wood 2.5	Wood 3.0
Total thickness	EN 428	2.0mm	2.5mm	3.0mm
Wear layer thickness	EN 429	0.2mm	0.3mm	0.3mm
Total weight	EN 430	3450g/m²	4560g/m²	5500g/m²
Surface treatment	---	PUR	PUR	PUR
Classification	EN 685	33-42	33-42	33-42
Reaction to fire	EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
Electrical properties	EN 1815	<2kV	<2kV	<2kV
Slip resistance	DIN 51130	R9-R10	R9-R10	R9-R10
Abrasion group	EN 660-2	Group T	Group T	Group T
Curl resultant to heat	EN 434	≤2mm	≤2mm	≤2mm
Residual indentation	EN 433	≤0.05mm	≤0.05mm	≤0.05mm
Impact sound reduction	EN ISO 717-2	4dB	5dB	6dB
Castor chair	EN 425	No damage	No damage	No damage
Thermal resistance	EN ISO 12524	0.25W/(m.K)	0.25W/(m.K)	0.25W/(m.K)
Light fastness	EN ISO 105-B02	≥6	≥6	≥6
Chemical resistance	EN 423	Good	Good	Good

2

Wood Collection

Wood Collection

LUXURY VINYL TILES

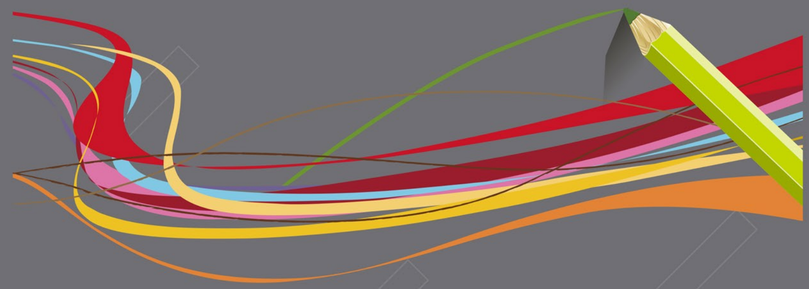

> Offices
> Education
> Healthcare
> Retail
> Show
> Public building






ID FLOORING
FLOORS THAT DEFINE YOU

Great design options
A people friendly solution
The best solution for every area and every application



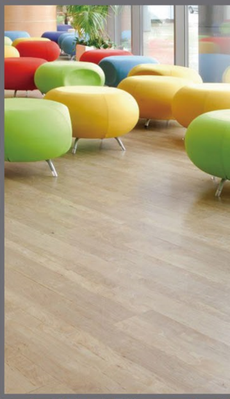





Offices | Stores & Shops | Gym | Dance | Housing | Education | Healthcare | Aged Care

AVAILABLE THICKNESS



2.0mm



2.5mm




3.0mm



4.0mm

ACOUSTIC UNDERLAY

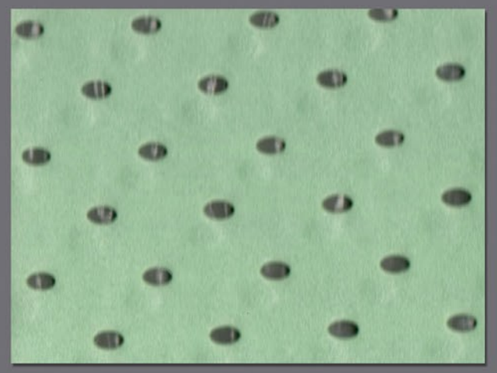


PE foam Size:1m×20m×2.0mm



Rubber foam Size:1m×20m×3.0mm

- Protection against humidity
- Powerful acoustic insulation
- Greater comfort
- Quick and easy to install

STRUCTURE OF WOOD

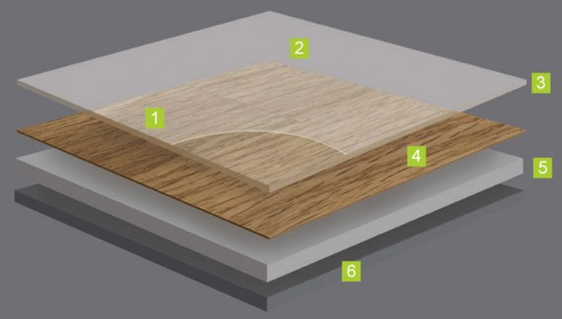

1. Surface embossing
   Textures close to real materials
2. PUR reinforcement
   Extreme resistance and easy low cost maintenance
3. Transparent wear layer
   Exceptional hardwearing and indentation resistant
4. High definition printing layer
   With great customisation possibilities
5. Unique composite sturcture
   Deimensional stability and excellent resistance to tear and indentation
6. PVC backing
   Suitable for either floating or glue-down installation

AVAILABLE DIMENSIONS

15.2 × 91.4 cm

45.7 × 45.7 cm

18.4 × 121.9 cm

45.7× 91.4 cm

2.0 mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm







THE ADVANTAGES OF LVT



Great Design Options

- 200+ colour options and 8 different surface aspects.
- Plank and tile dimensions that you can combine to compose you own flooring expressions.



Hard wearing and easy cleaning

- Treated with pur surface protection that hardens the surface and simplifies cleaning and maintenance through reduced use of water,enerty and chemical detergents.



Water resistant

- Suitable for wet areas such as bathrooms, kitchens, store rooms, basements, etc.
- Our waterproof floors keep their shape in those damp circumstances – they don't swell up and simply repel the water.



People-friendly solution

- Helps improve indoor air quality with VOC emissions below quantifiable levels, under 10µg/m³ after 28 days.
- Uses phthalate-free technology based on alternative plasticizers.

Wood Collection

Size: 6″×36″ (15.2cm × 91.4cm) / 7.25″×48″(18.4cm × 121.9cm)
Thickness: 2.0mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm



WD - 3001




WD - 3004



WD - 3002



WD - 3005

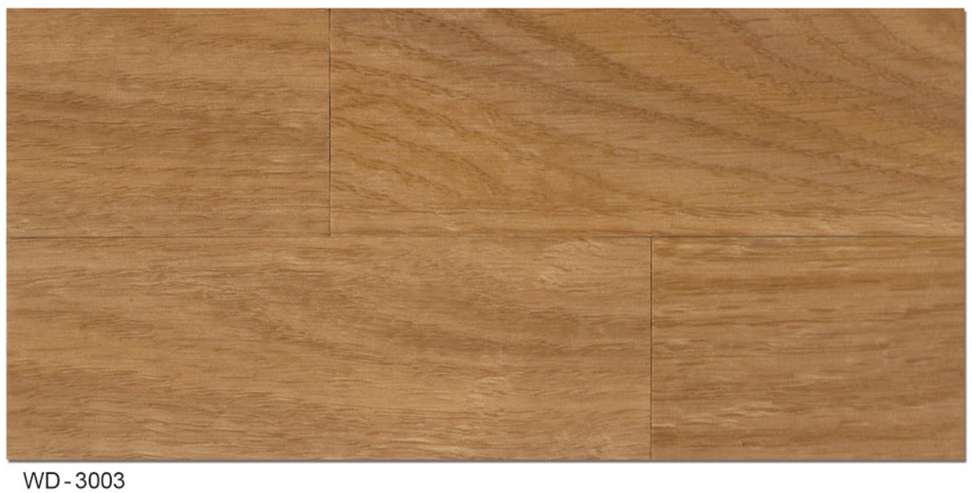

WD - 3003



WD - 3006


Wood Collection

Size: 6″×36″ (15.2cm × 91.4cm) / 7.25″×48″(18.4cm × 121.9cm)
Thickness: 2.0mm / 2.5mm / 3.0mm / 4.0mm / 5.0mm

Wood Collection


WD - 3007


WD - 3008

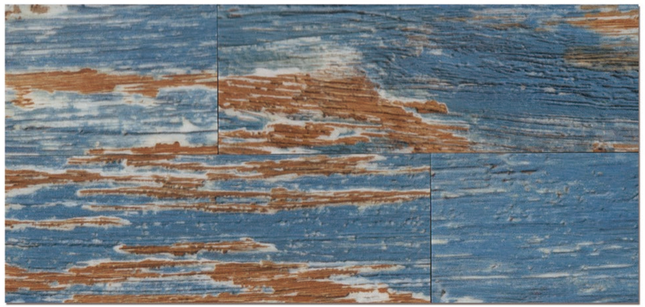
WD - 3009


WD - 3010


WD - 3011


WD - 3012


WD - 3013


WD - 3014


WD - 3015